



UL US
LISTED 187C
UL 325
UL 991

residential and commercial
SLIDE GATE OPERATOR

Class I, Class II, Class III, and Class IV Vehicular Gate Operator

100 CYCLES
in case of power failure*

Powerful and efficient
gear head motor




Fail safe- fail-secure
electromechanical lock



Adjustable-height for
the main drive

Standard
Back-up
battery

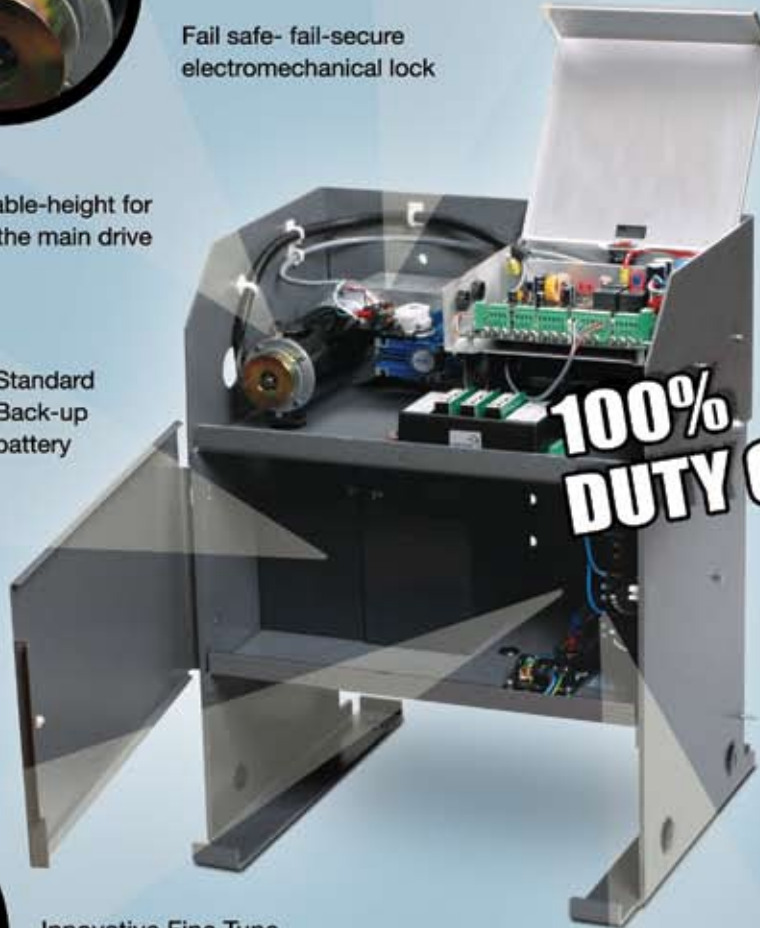

**100%
DUTY CYLCE**

More than
1/2 Kilowatt
of power

NEW FEATURE!



Innovative Fine Tune
Adjustment for the
end of gate travel
(down to 1/8")

Adaptive algorithm
with smooth acceleration
and deceleration



Operational Specifications

Operation	24 VDC
Main Power Source	120 / 220 VAC Single Phase
Battery (optional)	33 to 100 AmpHr 12 VDC x 2
Max Gate Weight	4,000 lbs.
Max Gate Length	80 Feet
Max Operating Speed	up to 16" per second
* Battery Backup Operation	100 Full Cycles (2000 lbs. / 40' gate)
Max Duty Cycle	100%
Operating Temperature	-4°F to +158°F

The Q-4™ incorporates a powerful and efficient DC motor, a high ampacity power supply, an integrated battery back-up system and intelligent controller. The incorporation of these features results in outstanding performance on heavy duty slide gates. The advanced motor control circuit drives the motor guarantees a long life for the brushes. The Q-4™ brings the advantages of DC gate operators into heavy duty applications.

WARRANTY
7 years residential
5 years commercial



VIKING
ACCESS SYSTEMS™
vikingaccess.com

800.908.0884